



# L A S E R T R A C K E R X

The FARO Laser Tracker Xi is a portable, contact measurement system that uses laser technology to accurately measure large parts and machinery across a wide range of industrial applications. It has a 230-ft. diameter range, achieves 0.001" 3-D single-point accuracy, and is rugged enough for the shop-floor environment. The system measures 3-D coordinates with its laser by following a mirrored spherical probe. The system can run in two modes: XtremeADM (Absolute Distance Measurement) and Interferometer; making it the most accurate and flexible Laser Tracker system.

- 230-foot range
- Up to .001" accuracy
- Automated compensation
- High-resolution interferometer
- XtremeADM instant beam acquisition

## Most Common Applications

### **Aerospace:**

Inspection & Certification, Automated Assembly Systems

### **Tool & Die:**

Master Molds, Tool Setup, Composite Tooling

### **Automotive:**

Tool Certification and Repeatability, Reverse Engineering

### **Heavy Equipment:**

In-Process/Large Part Inspection, Installation and Alignment



**A** XtremeADM

**B** SelfComp

**C** Smart Warm-Up

**D** Integrated Weather Station

**E** Versatile Mounting Options

**F** Spherically Mounted Retroreflectors



**A** Acquires the beam instantly with fast, high-accuracy Absolute Distance Measurement

**B** Automatically compensates to quickly ensure high accuracy

**C** Newly expanded operating temperature, along with Active Thermal Compensation make it ready for all environments

**D** Integrated Weather Station is part of the full featured standard equipment

**E** Mounts vertically, horizontally or upside down, providing versatility in tight or congested shop areas

**F** Certified Precision Probes

### System Specifications

Head size 11 x 21.8 in (280 x 554 mm)  
 Head weight 48 lbs (22 kg)  
 Controller size 6 x 7 x 11 in (160 x 180 x 280 mm)  
 Controller weight 12 lbs (5 kg)

### Environmental

Altitude -700 to 2,450 meters  
 Humidity 0 to 95% non-condensing  
 Operating Temperature - 5°F to 122°F (15°C to 50°C)

### Distance Measurement Performance\*

#### XtremeADM

Resolution 0.5µm  
 Sample rate 10,000 samples/sec  
 Accuracy 10µm + 0.4µm/m  
 RO Parameter 10 µm

#### Interferometer

Resolution 0.158µm  
 Accuracy 2µm + 0.4µm/m  
 Maximum radial velocity 4m/sec  
 RO Parameter 10 µm

### Range

Horizontal envelope +/- 270°  
 Vertical envelope +75 to -50  
 Minimum working range 0 m  
 Maximum working range 230-ft. (70 m) diameter

### Angle Measurement Performance\*


Angular accuracy 18µm + 3µm/m  
 Maximum angular velocity 180°/sec  
 Optional Precision Level Accuracy +/- 2 arcseconds

- \*Typical Accuracy shown is half the Maximum Permissible Error (MPE) and variation in air temperature is not included. MPE and all accuracy specifications are calculated per ASME B89.4.19 Standard.
- Specifications, descriptions, and technical data may be subject to change.

### Point-to-Point Typical Accuracy\*

#### Horizontal Scale Bar Measurement

Range(m)	XADM(mm)	IFM(mm)
2	0.032	0.031
5	0.046	0.046
10	0.068	0.068
20	0.110	0.110
30	0.153	0.153
35	0.174	0.174

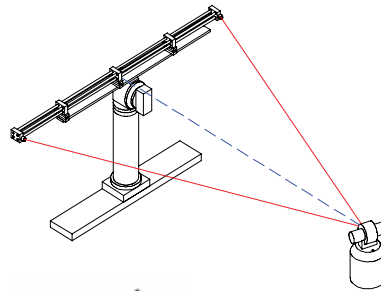

#### In-Line Distance Measurement

Length(m)	XADM(mm)	IFM(mm)
2 to 5 m	0.011	0.003
2 to 10 m	0.013	0.005
2 to 20 m	0.017	0.009
2 to 30 m	0.021	0.013
2 to 35 m	0.023	0.015



*"The FARO Laser Tracker has already saved us hundreds of hours in the development process."  
 — Eclipse Aviation*



GSA Contract Holder

**www.FARO.com**

**800.736.0234**



**ACCREDITED**  
**Certificate # L1147**